

Cleaning, maintenance & accessories guide

The Klikflor floor Cleaning and Maintenance Guide is designed to show you how to get the best from your Klikflor floor. Klikflor floors are very hardwearing and like all vinyl products, regular maintenance will enhance the performance, appearance and durability of your new floor.

We recommend that you order an 'Klikflor general purpose maintenance starter pack' with your new Klikflor floor. You will be able to order extra materials of the individual cleaning products from Klikflor.



Klikflor general purpose maintenance starter pack contains:

- 5ltr bottle of Klikflor Heavy Duty Cleaner / Stripper for the initial clean
- 5ltr bottle of Klikflor General Purpose Cleaner for routine cleaning
- 5ltr bottle of Klikflor Floor Polish / Floor Protector for sealing & protecting the floor (coverage: Approx. 125m²)
- 1 bucket of EVO3 Stubborn Stain Wipes
- 1 x Applicator
- 1 x Blue Pad for use with stripper and / or cleaner
- 1 x White Pad for use with polish
- 1 x measuring jug

Reference: 46.800


Price £155.00

Stage 1 – Klikflor Heavy Duty Cleaner and Stripper

Preparation: Before using our cleaning and maintenance products, you should sweep the floor with a soft brush. Following installation, use for the initial deep clean. Subsequently, use to remove previous applications of polish / floor protector.

- Dilute Basic Cleaner and Stripper approximately 1:5 with water (4 divider lines [200ml] to one litre of water – covers approx. 10m²). Spread solution liberally over the floor with mop.
- Leave to work for approximately 5 minutes
- Scrub the floor with the blue applicator and green pad
- Remove residue with mop, then rinse thoroughly with clean water

Note: Basic Cleaner and Stripper should NOT be allowed to dry on the floor. While applying Basic Cleaner and Stripper wear rubber gloves. For the removal of stubborn marks, use Basic Cleaner and Stripper undiluted overnight.

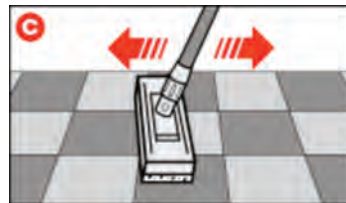

Stage 2 – Klikflor Polish / Floor Protector

Klikflor Polish / Floor Protector will create a matt, anti-slip film finish to help protect your floor from marks and fine scratches, and helps to simplify routine cleaning. Before proceeding with application ensure the floor is completely dry and free of all traces of Basic Cleaner and Stripper.


- Using the blue applicator with the white pad, spread a thin and even layer of undiluted Klikflor Polish / Floor Protector, in one direction.

B. Leave this layer to dry for approximately 30 minutes...

C. Then repeat the process in a transverse direction. (IMPORTANT: white pad must be rinsed thoroughly immediately afterwards, for future use).

D. Leave to dry without walking on the surface for at least 6 hours, or preferably overnight.

Note: When, after a period of time, the Klikflor Polish / Floor Protector needs replenishing, begin the process from stage 1 again. To maintain the protective layer, the Klikflor Polish / Floor Protector will need to be stripped and reapplied every 6 to 12 months subject to the level of traffic/usage.

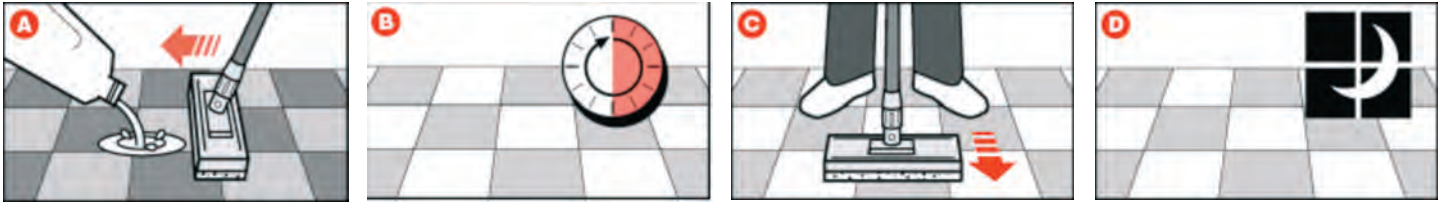

Stage 3 – Klikflor General Purpose Cleaner


Use regularly for easy cleaning of your Klikflor floor.

A. Use 50ml (1 divider line) in a bucket with about 8 to 10 litres of water for manual cleaning.

B. Keeping the mop damp, not wet, mop over the entire floor area. Leave to dry.

Attention: Keep locked up and out of reach of children.

Note: For larger areas use a rotary scrubber dryer using between a 1:200 and 1:100 mix dependent on the level of dirt/soiling.

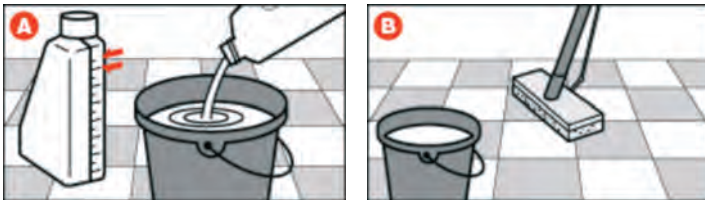

Protecting your floor

Do

- Use quality fibre mats at entrances to minimise dirt and grit being brought in from outside. (Warning: Avoid rubber-backed mats as some types can cause permanent floor discolouration.)
- Use protective pads under furniture legs to prevent fine scratches.
- Use load-bearing castors to prevent indentation from heavy items of furniture.
- Mop up spillages as soon as possible to prevent spots becoming stains.
- Use of the Klikflor Polish/Floor Protector should ensure better protection from most substances.

Do Not

- Slide or drag appliances or furniture across the floor.
- Allow cigarettes or other hot items to come into contact with the floor, as they can cause permanent damage.
- Apply thick coatings of Klikflor Polish/Floor Protector Two or three thin coats as per our instructions is sufficient.
- Use non- Klikflor cleaning products. Some cleaning products contain agents that can damage the floor.
- Allow silicone-based products such as furniture polish or glass cleaner to come into contact with the floor. These can make the floor very slippery.
- Allow rubber backed mats or rubber footed furniture to come into contact with the floor. Permanent discolouration may occur.



Klikflor PVC-U skirting boards

The perfect way to finish your interlock floor tile installation: Klikflor PVC-U skirting boards are the ultimate no hassle, no maintenance, easy fit and cost effective way to add the essential finishing touch to your Klikflor installation. No more time-consuming sanding and messy painting of timber skirting boards or architraves, and no trickier mitring of corner joints. The wipe-clean surface means your room trims will stay looking clean and fresh for life.

- Maintenance-free: PVC-U is maintenance-free. Any scuffs can simply be wiped off
- Colour options: Klikflor is available in a dark grey finish.
- Sizes available: Skirting board: 100mm high x 15mm deep x 2.5m long
- Accessories: Internal Corner Section, External Corner Section, Skirting in-line joint moulding section

Prices: Skirting profile: £19.50 per 5m length or £9.99 per 2.5m length

Internal Corners: £8.49 per pack of 4 / External Corners: £4.99 per pack of 2

In-line Connector Joint: £16.22 per pack of 10 / SP050 Skirting Adhesive – 310ml cartridge: £5.95 each

All quoted price are subject to VAT which will be charged at the standard rate and a delivery charge.